



TM

# SUNRISE SOLAR

A Product Brand of an ISO 9001:2008 Certified Company

## Technical Specifications(20 Wp-40 Wp)

Power (Pm) in Watts (Nominal)	20 Wp	25 Wp	30 Wp	35 Wp	37 Wp	40 Wp
Open Circuit Voltage (Voc) in Volts	21.5	21	21	21	21	21.5
Short Circuit Current (Isc) in Amps	1.30	1.60	1.90	2.30	2.30	2.50
Voltage at Maximum Power (Vmp) in Volts	17.5	17.0	17.0	17.0	17.0	17.5
Current at Maximum Power (Imp) in Amps	1.14	1.47	1.76	2.06	2.15	2.30
Maximum System Voltage	1000V	1000V	1000V	1000V	1000V	1000V

## Construction Features

**Type of cell:** Mono/Multi-Crystalline Si

**Front Face:** Tempered Glass & Low Iron

**Encapsulate:** Ethylene Vinyl Acetate


**Frame :** Anodized Aluminium

**Junction Box :** Weather Proof Nylon 6


**Warranty :** Warranty up to 05 years

**Note:** Due to constant product modifications, Krishna Solar House reserves the right to amend the above specifications without prior notice

## Mounting Details

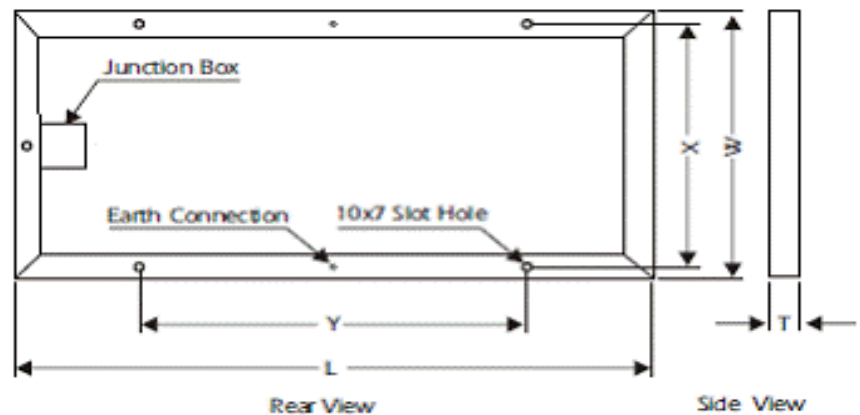

## Panel Photograph

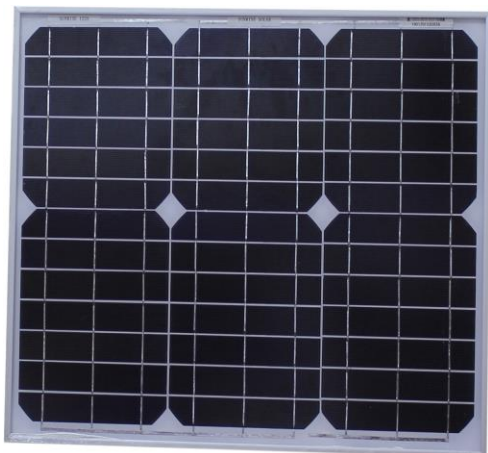

**Model Type** : *SUNRISE 1225*

**Dimension** : *500 by 400 by 25 mm*

**Power** : *25 Wp 12 Volt*

**Type** : *Mono Crystalline*

**Model Type** : *SUNRISE 1240*

**Dimension** : *630 by 550 by 35 mm*

**Power** : *40 Wp 12 Volt*

**Type** : *Mono Crystalline*



**Call 9534344400**

## Have a question? Need help?

Our team is ready to answer your questions and help in anyway! Please CALL, EMAIL or FILL IN the ENQUIRY FORM and a representative will get back to you!

**Web-[www.krishnasolar.in](http://www.krishnasolar.in)**

**Email-[info@krishnasolar.in](mailto:info@krishnasolar.in)**

