



TM

SUNRISE SOLAR

A Product Brand of an ISO 9001:2008 Certified Company

Technical Specifications(45 Wp-90 Wp)

Power (Pm) in Watts (Nominal)	45 Wp	50 Wp	60 Wp	70 Wp	75 Wp	90 Wp
Open Circuit Voltage (Voc) in Volts	21	21	21	21	21.5	22
Short Circuit Current (Isc) in Amps	2.80	3.10	3.70	4.35	4.50	4.90
Voltage at Maximum Power (Vmp) in Volts	17.0	17.0	17.0	17.0	17.5	18.0
Current at Maximum Power (Imp) in Amps	2.65	2.90	3.50	4.10	4.28	4.65
Maximum System Voltage	1000V	1000V	1000V	1000V	1000V	1000V

Construction Features

Type of cell: Mono/Multi-Crystalline Si

Front Face: Tempered Glass & Low Iron

Encapsulate: Ethylene Vinyl Acetate


Frame : Anodized Aluminium

Junction Box : Weather Proof Nylon 6

Warranty : Warranty up to 05 years

Note: Due to constant product modifications, Krishna Solar House reserves the right to amend the above specifications without prior notice

Mounting Details

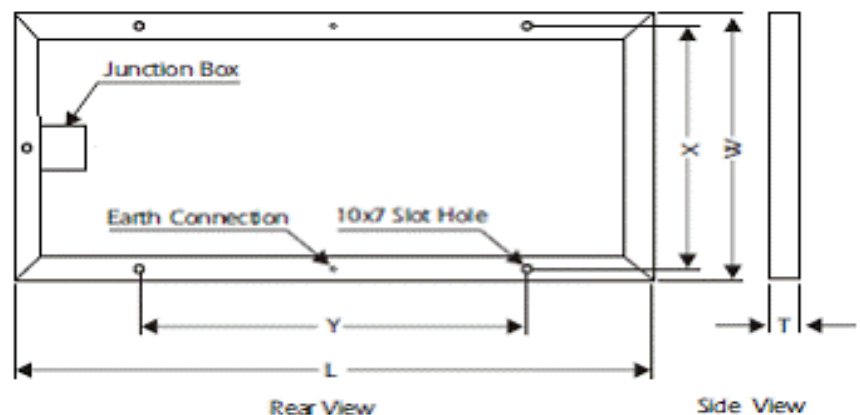

Panel Photograph



Model Type : *SUNRISE 1275*

Dimension : *1205 by 535 by 35 mm*

Power : *75 Wp 12 Volt*


Type : *Poly Crystalline*

Model Type : **SUNRISE 1290**

Dimension : **1205 by 535 by 35 mm**

Power : **90 Wp 12 Volt**

Type : **Mono Crystalline**

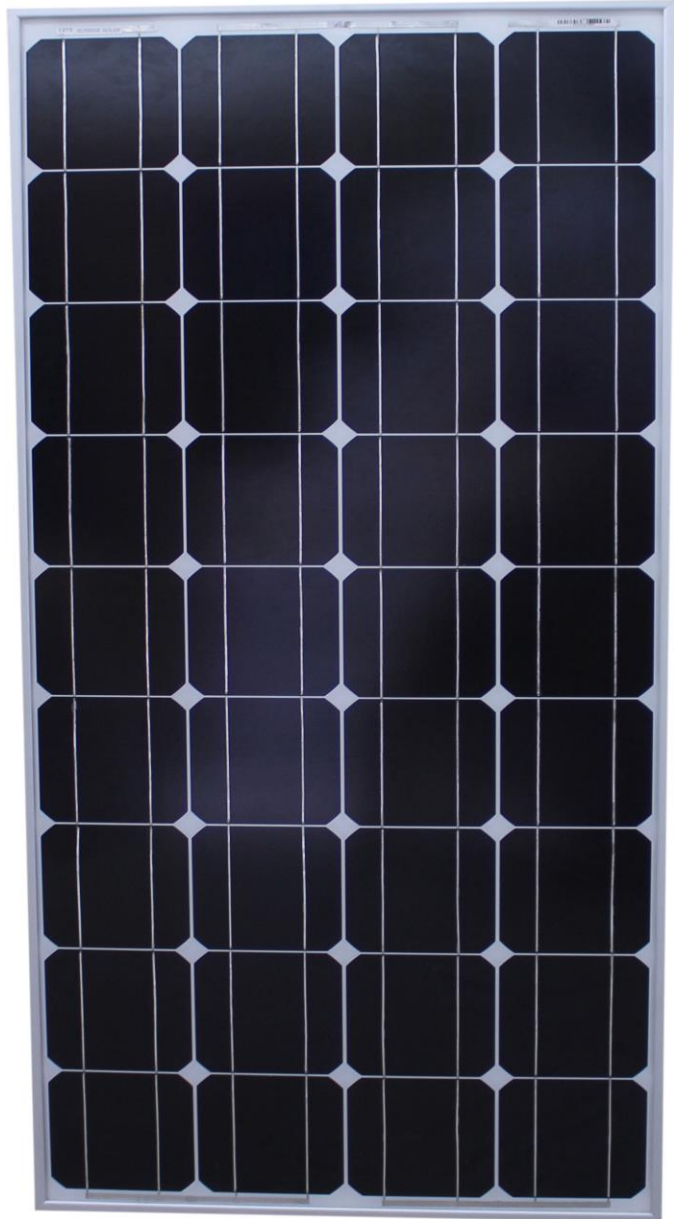

Call 9534344400

Have a question? Need help?

Our team is ready to answer your questions and help in anyway! Please CALL, EMAIL or FILL IN the ENQUIRY FORM and a representative will get back to you!

Web-www.krishnasolar.in

Email-info@krishnasolar.in

